CREATIVE.LIGHTING

Space Projection Light

PRO Ultra HD

Product manual



www.creative.lighting

Safety information

Read this manual before use and check that the projector and accessories arrived in good condition. Use indoors with a DC 5 V / 2 A adapter and the included USB-C cable. Do not disassemble the projector or its components.

What’s in the box

PRO Ultra HD projector, 19 projection motif discs, USB-C cable and user manual.

Product overview

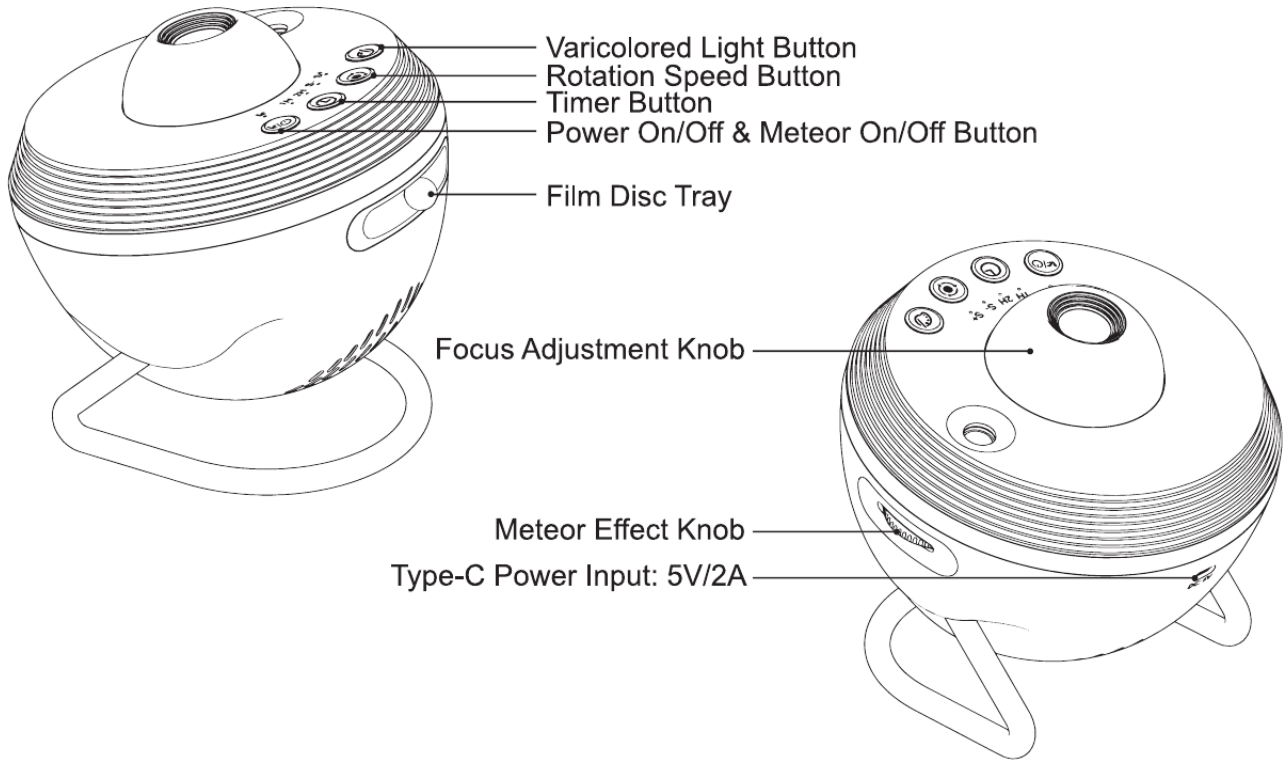

Controls, disc tray, focus knob and USB-C power input

Power input	DC 5 V / 2 A	**Focus range**	0.5–3 m (1.6–9.8 ft)
Maximum power	10 W	**Dimensions**	13.5 × 12.8 cm

Setup

1. **Position the projector**
   Place it on a stable surface and aim it at a wall or ceiling. For a clear image, darken the room and start about 2 m (6.6 ft) from a light-colored surface.

2. **Insert a projection disc**
   With the projector off, pull out the disc tray. Place the disc in the slot with “UP” facing upward. Turn the disc slightly until it locks in place, then slide the tray back in.

3. **Connect power**
   Plug the USB-C cable into the projector and a DC 5 V / 2 A adapter. On connection, projection, the meteor effect and ambient lighting start automatically.

4. **Focus the image**
   Turn the focus knob in either direction until the image is sharp. The focus range is 0.5–3 m (1.6–9.8 ft).

How to use

Power and meteor effect

Press and hold the power button to turn the projector on or off. Press it briefly to toggle the meteor effect. The meteor indicator lights up when the effect is active. Turn the meteor effect knob to change the effect.

Rotation speed

Press the rotation button to cycle through slow (S−), fast (S+) and stopped (both speed indicators off). Slow mode is the default and simulates the gradual orbit of planets.

Sleep timer

Press the timer button to cycle through 1 hour, 2 hours and the default 4-hour auto shutoff. The 1H and 2H indicators show when those timers are active.

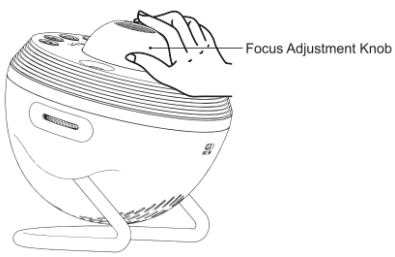

Ambient lighting

The default is a seven-color gradient. Briefly press the ambient light button to cycle through four color effects, white night light, warm white night light and off.

Press and hold to increase brightness in steps. Release, then press and hold again to decrease it. When the projector is off, briefly press the button to switch the ambient light on or off independently.

Changing a disc

1. **Switch off the projector**
   Pull out the disc tray.
2. **Remove the current disc**
   Grip the disc edge and turn it about 2 mm in either direction until it lines up with the slot grooves. Lift it out.
3. **Insert and lock the new disc**
   Align the new disc with the grooves, with “UP” facing upward. Turn the disc slightly in either direction until it locks, then slide the tray back in.

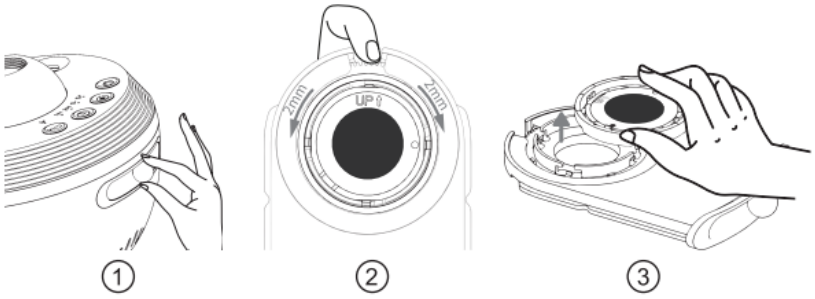

Remove the tray, turn the disc to unlock it, then lift it out.

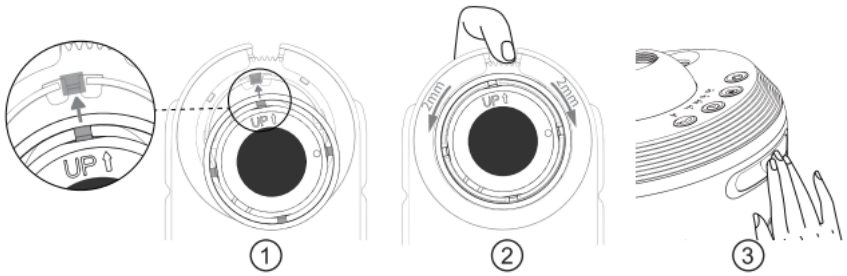

Align the “UP” mark, turn to lock, then reinsert the tray.

Care and maintenance

Handle the film discs by their edges. They are consumable accessories, so alternate them regularly to avoid wearing out a single disc.

Troubleshooting

No power
Check the cable connection and the adapter rating. The projector requires DC 5 V / 2 A. Higher voltage can damage it, and lower voltage may prevent it from starting.

Blurry image
Turn the focus knob, check the projection distance and try a light-colored surface in a dark room.

Image does not rotate
Select S− or S+. The corresponding blue indicator should stay lit when rotation is active.

If the issue continues, please contact customer service.

Specifications

Product model	SKE-TKQ01
Dimensions and materials	13.5 × 12.8 cm; PVC and ABS
Power input / maximum power	DC 5 V / 2 A; 10 W
Projection method and source	Film disc projection with LEDs
Focus range	0.5–3 m (1.64–9.84 ft)
Projection area at 2–3 m	12.5–23.75 m² (134.55–255.64 sq ft)
Recommended environment	Dark indoor room; white wall about 2 m (6.56 ft) away
Night light output	3.5 W
Ambient light settings	Four color effects, white night light, warm white night light
Operating temperature	−20 to 50 °C (−4 to 122 °F)
Storage temperature	−20 to 60 °C (−4 to 140 °F)